

17 Calibration certificates

Simulator KA 7531-1



**Simulator
for Pt100, thermocouples,
mV, V, mA, Hz
Option PC interface**

Technical features

- Universal manual simulator for simulating temperature sensors and process variables when testing measuring instruments, regulators, and other equipment
- Pt100 simulation with 5 fixed resistors in 4-conductor technology
- Voltage and thermocouples simulation with 15-bit D/A converter
- Current simulation with 15-bit D/A converter
- Frequency and pulse generator with quartz-crystal oscillator
- Continuity check with settable threshold
- All signals are available at the same time.
- Signals can be set either manually or automatically, in step or ramp form.
- All signals and all the programming can be shown on the illuminated graphics display.
- Connection of peripherals via ALMEMO® clamp connectors, cable with anti-kink protective sleeve and strain relief
- Power supply via battery or mains unit
- Modern, compact housing - also suitable for DIN top-hat rail mounting
- Option of PC-controlled operation via all ALMEMO® data cables.


Technical data

Signal Pt100	5 discrete resistance values in 4-conductor technology 0 / 50 / 100 / 200 / 300 °C	signal frequency	1..4000Hz, 0.01..10.00kHz, 0.1..40.0kHz, 1..100kHz
Accuracy	±0.1°C	Pulse width	1 to 99 %
Temperature drift	0.01°C / K	Accuracy	corresponds to the resolution
Signal voltage	15-bit DAC electr. isolated load > 1 MΩ	Pulse range	
-10 to +60.000 mV	load > 100 kΩ	Period	2µs...99.999 ms, 2ms...99.999 s
-3 to 10.000 V		Pulse	1µs...99.998 ms, 1ms...99.998 s
Accuracy	± 0.05% of measured value ± 0.05% of final value	Accuracy	0.01 %
Temperature drift	20 ppm / K	Continuity	current approx. 1 mA
Time constant	100 µs	Threshold	0 to 1000 mV
Thermocouples	type K, N, T, J (ITS90) resolution: 0.1K type S, R, B (ITS90) resolution: 1K	Power supply:	10..12V DC
Accuracy:	± 0.05% of measured value ± 0.05% final value	Battery:	3 Mignon Alkaline
CJ - temperature:	-30..100°C	Current consumption	(Battery): approx. 30 mA
Signal current	15-bit DAC electr. isolated load < 500 Ω	Voltage and Current output: with illumination:	approx. 80mA + 4 x IOU, approx. 40mA additional
0 to 20.0 mA		Display	graphics 128 x 64 (55 x 30 mm)
Accuracy	± 0.05% of measured value ± 0.05% of final value	Illumination	2 white LEDs
Temperature drift	20 ppm / K	Keypad	7 silicone keys (4 soft-keys)
Time constant	100 µs	Housing	(LxWxH) 127 x 83 x 42 mm ABS (-10 to +70 °C), 290 g
		Operating range:	
		Operating temperature:	-10 ... +50 °C
		(Storage temperature):	-20 ... +60 °C
		Ambient humidity:	10 ... 90 % rH (noncondensing)


Displays (examples)




Main menu

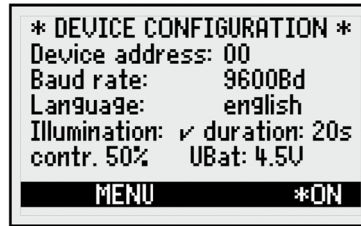


Device configuration

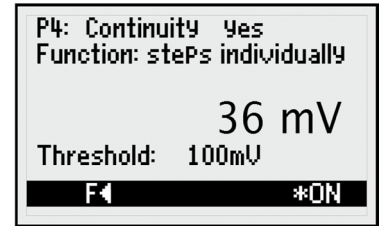


Continuity tester

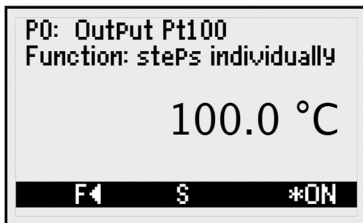


Pt100 resistance values

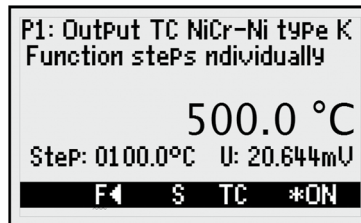


NiCr-Ni step generator

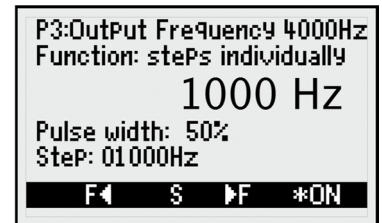

Frequency pulse generator

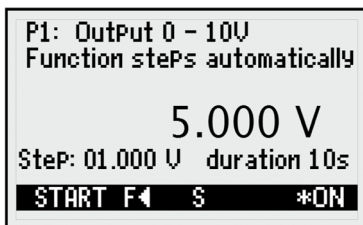

0 to 10 V step generator

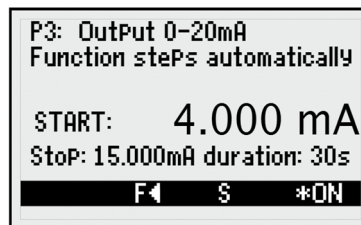

0 to 20 mA ramp generator

Accessories

	Order no.
ALMEMO® clamp connector (for Pt100 or universal use)	ZA1000TS
ALMEMO® connecting cable with 2 banana plugs and 2 test probes	ZA1000TK
Mains adapter 12 V / 1.5 A	ZA1312NA12
USB data cable, electrically isolated	ZA1919DKU
V24 data cable, electrically isolated	ZA1909DK5
Fixture for top-hat rail mounting	ZB2490HS
Rubber guard, gray	ZB2490GS2

Options

	Order no.
DAkkS calibration certificate for Simulator KA7531: DAkkS calibration fulfills the requirements of DIN EN ISO/IEC 17025 for test equipment (e.g. for monitoring production processes or quality assurance of products). Calibration is carried out by a DAkkS body using the comparison method against reference standards that are traceable to national standards. Calibration in 6 measuring ranges: Pt100 (5 points) and (3 points each) voltage 10 V, voltage 50 mV, current 20 mA, thermocouple type K, frequency Hz, package offer	KE9006D
Factory calibration certificate for Simulator KA7531: Electrical Calibration according to the comparison method compared reference standards that are traceable to national standards. Calibration in 6 ranges: Pt100 (5 points), and (3 points each) voltage 10 V, voltage 50 mV, current 20 mA, thermocouple type K, frequency Hz, Package Offer Addressable PC interface	KE9006W OA7531I

Included as standard

Simulator, 5 sockets for Pt100, thermocouples or -4 to 10 V, 0 to 20 mA, frequency, continuity tester, Graphics display and keypad, sockets DC, A1, batteries, including manufacturer's test certificate, 1 ALMEMO® clamp connector (for Pt100) and ALMEMO® and ALMEMO® connecting cable with 2 banana plugs and 2 test probes

Order no.

KA7531I