


Digital ALMEMO® D7 measuring connector for thermocouple sensors of type K, N, T, J, R, S, B, E

Measure dynamic temperature changes with up to 100 measurement operations per second.

One single connector for different thermocouple types (programmable).

Optimal linearization accuracy of the thermocouple characteristic by calculation methods as per the DIN IEC 584.

Increased accuracy thanks to multi-point adjustment of the thermocouple sensor during calibration. For current measuring instruments ALMEMO® V7, i.a. the precision measuring instruments ALMEMO® 710 or ALMEMO® 202.



Technical data and functions

- The digital ALMEMO® D7 measuring connector for thermocouples can be used for a variety of thermocouple types. Once connected, the thermocouple type is programmed via the ALMEMO® V7 measuring instrument.
- new:** the range for thermocouple type E. For use at lowest temperatures.
- The thermocouple is connected via 2 screw terminals integrated in the measuring connector. Every measuring connector has an integrated temperature sensor directly in the screw terminals for measurement and automatic compensation of the cold junction temperature.
- The input of the ALMEMO® D7 measuring connector is galvanically isolated from the ALMEMO® V7 measuring instrument. Therefore the connected thermocouple sensor is galvanically isolated from the other connected ALMEMO® sensors as well.
- The digital ALMEMO® D7 measuring connector operates with its own integrated A/D converter. The linearization of the thermocouple characteristic is calculated using method in compliance with DIN IEC 584 (not an approximation).
- For measuring dynamic temperature changes, the ALMEMO® D7 measuring connector operates at a fast conversion rate. The

measuring rate is determined exclusively by the integrated A/D converter.

- On the ALMEMO® V7 measuring instrument all D7 measuring connectors operate in parallel - each at its own measuring rate. The measuring instrument's very short scan cycle is determined by the measuring rates of the D7 measuring connectors - nearly irrespective of their number. The ALMEMO® V7 measuring instrument saves the measured values; the measuring software WinControl displays them graphically.
- The overall accuracy of the measuring operation is unaffected by the presence of an ALMEMO® V7 display device / data logger. In case the measuring chain - consisting of a thermocouple sensor and the connected ALMEMO® D7 measuring connector - is calibrated, the measuring chain can be connected to any ALMEMO® V7 measuring device without any additional measuring uncertainties.
- At constant ambient conditions, an increased system accuracy is achieved by calibrating the thermocouple sensor using multi-point adjustment.
- To designate a sensor it is possible to program comments with up to 20 characters.

Technical data

Sensor type:	Thermocouple type: K, N, T, J, R, S, B, E																				
Measuring input:	galvanically isolated, dielectric strength 50V																				
Measuring ranges:	<table border="0"> <tr><td>K</td><td>-200.0 to +1370.0 °C</td></tr> <tr><td>N</td><td>-200.0 to +1300.0 °C</td></tr> <tr><td>J</td><td>-210.0 to +1100.0 °C</td></tr> <tr><td>E</td><td>-270.0 to +800.0 °C</td></tr> <tr><td>T</td><td>-200.0 to +400.0 °C</td></tr> <tr><td>S</td><td>-50.0 to +1760.0 °C</td></tr> <tr><td>R</td><td>-50.0 to +1760.0 °C</td></tr> <tr><td>B</td><td>+250.0 to +1820.0 °C</td></tr> <tr><td>K2</td><td>-200.00 to +1370.00 °C</td></tr> <tr><td>new: N2</td><td>-200,00 to +1300,00 °C</td></tr> </table>	K	-200.0 to +1370.0 °C	N	-200.0 to +1300.0 °C	J	-210.0 to +1100.0 °C	E	-270.0 to +800.0 °C	T	-200.0 to +400.0 °C	S	-50.0 to +1760.0 °C	R	-50.0 to +1760.0 °C	B	+250.0 to +1820.0 °C	K2	-200.00 to +1370.00 °C	new: N2	-200,00 to +1300,00 °C
K	-200.0 to +1370.0 °C																				
N	-200.0 to +1300.0 °C																				
J	-210.0 to +1100.0 °C																				
E	-270.0 to +800.0 °C																				
T	-200.0 to +400.0 °C																				
S	-50.0 to +1760.0 °C																				
R	-50.0 to +1760.0 °C																				
B	+250.0 to +1820.0 °C																				
K2	-200.00 to +1370.00 °C																				
new: N2	-200,00 to +1300,00 °C																				
Resolution:	0.1 K* respectively 0.01 K for measuring range K2 / N2																				
Conversion rate:	2.5*, 10, 50, 100 mops																				
Linearization	calculation method (not an approximation)																				

System accuracy at conversion rate 10 mops:	
type K, K2, N, N2, J, T	±0.2K ±0.02% of measured value
type E	±0.1K ±0.02% of measured value
type R, S, B	±0.8K ±0.02% of measured value
Temperature drift	0.003 %/K (30 ppm)
Cold junction compensation sensor:	NTC 10K at 25°C
Cold junction compensation effective in the range -10 °C to +60 °C:	-30°C to +100°C
System accuracy:	±0,2K ± 0,01K/°C
Nominal temperature:	23 °C ± 2 K
Supply voltage:	6, 9, 12 V from ALMEMO® device
Current consumption:	approx. 5 mA
Environmental conditions	see page 01.04 onwards

* Factory setting. The desired measuring range can be programmed on the ALMEMO® V7 device..

Types:


ALMEMO® D7 measuring connector for thermocouples. Fast measuring rate. Integrated galvanic isolation.

Order no.

ZTD700FS

Input connectors for thermocouples

ALMEMO® Connector for Thermocouple Types K, N, J, T



Variants (with thermal material)

Model	Meas. Range	Resolution	Order no.
NiCr-Ni (K)	-200.0 to +1370.0°C.	0.1 K	ZA9020FS
NiCroSil-NiSil (N)	-200.0 to +1300.0°C.	0.1 K	ZA9021FSN
Fe-CuNi (J)	-200.0 to +1000°C.	0.1 K	ZA9021FSJ
Cu-CuNi (T)	-200.0 to +400°C.	0.1 K	ZA9021FST

ALMEMO® measuring module for thermocouples, types K, J, T, electrically isolated, up to 1000 V Type ZAD 950 AB



- Electrically isolated measurement of thermocouples (in particular bare thermo-wire types) on live parts
- Digital transfer of measured values to the ALMEMO® measuring instrument
- Connecting cable, fitted with ALMEMO® plug

Technical data

Sensor	Thermocouple		
Measuring range		Electrical isolation	1 kV DC/AC permanent, 4 kV for 1s
ZAD950ABK	NiCr-Ni (K) -200 to 1370 °C	Sensor connection	4-mm safety sockets and safety plugs (with screw terminals)
ZAD950ABJ	Fe-CuNi (J) -200 to 1000 °C	Power supply	6 to 13 VDC via ALMEMO® device
ZAD950ABT	Cu-CuNi (T) -200 to 400 °C	Current consumption	approx. 30 mA
Resolution	0.1 K	Connecting cable	1.5 meters with ALMEMO® plug
Linearization accuracy	±0.05 K ±0.05 % of measured value	Housing	Dimensions (LxWxH) 127x83x38mm, ABS (acrylonitrile butadiene styrene)
Precision class	C (see page 01.05)		
Measuring rate	2.5 measurements/sec.		

Types:

- ALMEMO® measuring module for NiCr-Ni (K), including 1.5 meters ALMEMO® connecting cable
 - ALMEMO® measuring module for Fe-CuNi (J) including 1.5 meters ALMEMO® connecting cable
 - ALMEMO® measuring module for Cu-CuNi (T) including 1.5 meters ALMEMO® connecting cable
- Please note : thermocouple must be ordered extra; e.g. thermo-wires see Chapter Temperature


Order no.
ZAD950ABK
ZAD950ABJ
ZAD950ABT

DAkKS- or Factory calibration KE90xx, electrically, for digital measuring module, see Chapter Calibration.
DAkKS calibration meets all the requirements regarding test resources laid down in DIN EN ISO/IEC 17025.

Input connectors for thermocouples


ALMEMO® Connector for Thermocouple Types U, L, S, R, B, AuFe-Cr

10/2021 • We reserve the right to make technical changes.

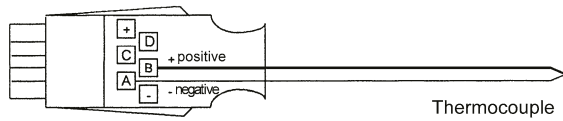

Types			Order no.
Model	Meas. Range	Resolution	
Cu-CuNi (U)	-200.0 to +600.0°C	0.1 K	ZA9000FSU
Fe-CuNi (L)	-200.0 to +900°C.	0.1 K	ZA9000FSL
PtRh10-Pt (S)	0.0 to +1760.0°C	0.1 K	ZA9000FSS
PtRh13-Pt (R)	0.0 to +1760.0°C	0.1 K	ZA9000FSR
PtRh30-PtRh6 (B)	+400.0 to +1800.0°C	0.1 K	ZA9000FSB
AuFe-Cr (A)	-270.0 to +60.0°C	0.1 K	ZA9000FSA

ALMEMO® Connector with integrated cold junction sensor for all thermocouples



For especially exacting applications demanding the highest possible level of precision or performed under unfavorable conditions (e.g. subject to thermal irradiation)

Programming:

1st channel, NTC, integrated cold junction sensor, resolution 0.01 K

2nd channel, thermocouple, resolution 0.1 K; please specify type !

Types:			Order no.
Model	Meas. Range	Resolution	
NiCr-Ni (K)	-200.0 to +1370.0°C.	0.1 K	ZA9400FSK
NiCroSil-NiSil (N)	-200.0 to +1300.0°C.	0.1 K	ZA9400FSN
Fe-CuNi (L)	-200.0 to +900°C.	0.1 K	ZA9400FSL
Fe-CuNi (J)	-200.0 to +1000°C.	0.1 K	ZA9400FSJ
Cu-CuNi (T)	-200.0 to +400°C.	0.1 K	ZA9400FST
Cu-CuNi (U)	-200.0 to +600.0°C	0.1 K	ZA9400FSU
PtRh10-Pt (S)	0.0 to +1760.0°C	0.1 K	ZA9400FSS